

Sockets Quotation Worksheet

For quotation only. Not an order.






NAME _____ TITEL _____

COMPANY _____









ADDRESS _____ CITY _____ STATE _____ ZIP _____

E-MAIL _____ PHONE _____ FAX _____

Socket Type

- Type A (tapered) 
 Type B (straight) 
 Type C (shouldered) 

Broach Opening

- Hex 
 Double Square 
 Torx® 
- Double Hex 
 Fast Lead 
 Other 
- Square 
 Surface Drive 

Magnetic

- Magnetic Bolt Clearance (MB)
 Magnetic Bolt Clearance with retaining ring (RMB)
 Strip Magnet (SM)
 Fixed Magnet (M)
 Non-magnetic

Drive Configuration

- DIN Standard
 No DIN groove
 Cross Hole (one wall only)

Extensions

- Hex Drive _____ Size _____
 Female Square _____
 Other _____

Extension Length


- No extension required


Quantity _____

Applied or Driving Torque _____

Additional _____

Abmessungen

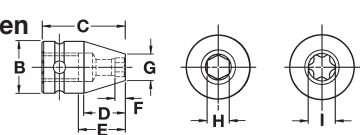

- A.** Square drive _____
B. Drive end diameter _____
C. Overall Length _____
D. Taper or shoulder length _____
E. Bolt clearance depth _____
F. Broach depth _____
G. Nose end diameter _____
H. Broach opening _____
I. Torx® size  _____

Nylon Covers Requirements

Components To Be Covered

- Bit only
 Bit and Bit Holder

Cover Features

- Flush with tip of bit
 Exposed tip of bit
 Retractable
 Embedded magnets
 Press fit
 Free-spinning (able to spin independently of part being covered)
 O.D. limitations (must specify) _____
 Other considerations (must specify) _____